

# 440~465M

AS440-465BM6-144 FULL BLACK

## MORE POWER

**UP TO 21.30%** Maximize the light absorption area, module efficiency up to 21.30 %.

Low temperature coefficient (Pmax): -0.35 % /°C.


Better shading tolerance.

## MORE RELIABLE

Lower internal current, lower hot spot temperature.


Cell crack risk limited in small region, enhance the module reliability.

Heavy snow load up to 5400 Pa, wind load up to 2400 Pa.

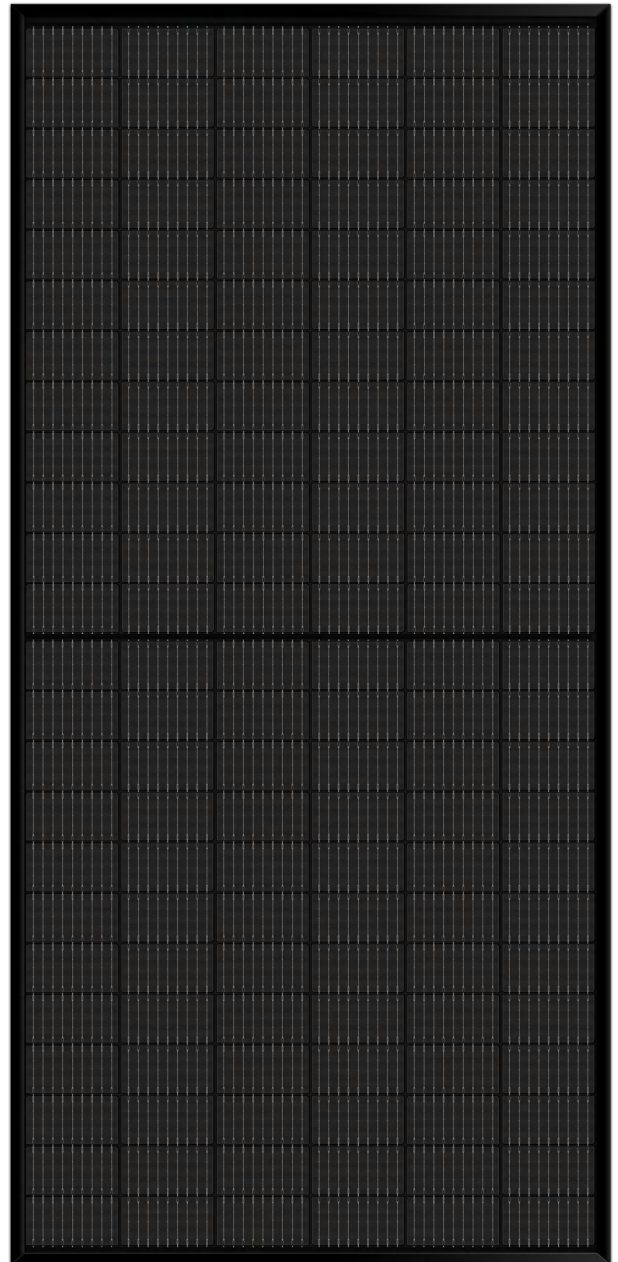

**12** 12-year Product Warranty

**25** 25-year Linear Performance Warranty

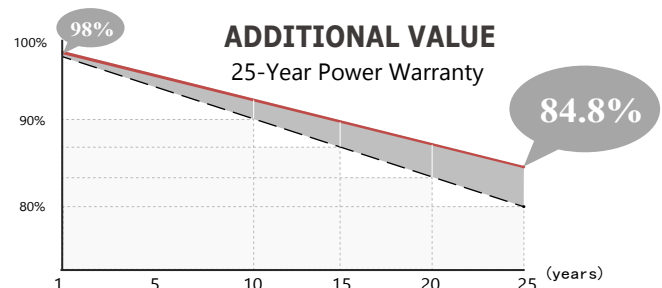

AS440-465BM6-144

# 440-465W

Half-Cell High Efficiency PV Module

**Weight**

**23.0kgs±3%**

**Cells Type**


**Mono 166x83mm**

**Dimension(LxWxT)**

**2102±2mmx1040±2mmx35±1mm**

**Packaging**

**31pcs/pallet, 726pcs/40HQ container**

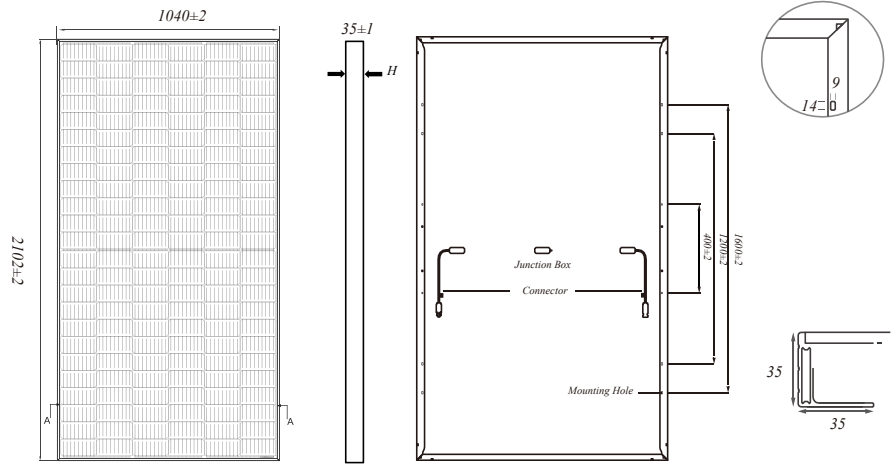

Front

Side

Back

Remark: customized frame color and cable length available upon request

**MECHANICAL SPECIFICATION**

Cell	Mono
No.of cells	144(6x24)
Cable Length	300mm(+)/300mm(-)
Cable Cross Section Size	4mm <sup>2</sup> (IEC)
Junction Box	IP67,3 diodes
Connector	MC4 Compatible

**OPERATING PARAMETERS**

Maximum System Voltage	1500VDC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum StaticLoad,Front	5400Pa(112lb/ft <sup>2</sup> )
Maximum StaticLoad,Back	2400Pa(50lb/ft <sup>2</sup> )
Safety Class	Class II

**ELECTRICAL CHARACTERISTICS** STC:AM1.5 1000W/m<sup>2</sup> 25°C NOCT:AM1.5 800W/m<sup>2</sup> 20°C 1m/s Test uncertainty for Pmax ±3%

Module Type	AS440BM6-144		AS445BM6-144		AS450BM6-144		AS455BM6-144		AS460BM6-144		AS465BM6-144	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	440	333	445	336	450	340	455	344	460	348	465	352
Open Circuit Voltage(Voc/V)	49.40	46.40	49.56	46.65	49.70	46.90	49.85	47.15	50.01	47.38	50.15	47.61
Short Circuit Current(Isc/A)	11.28	9.16	11.32	9.20	11.36	9.25	11.41	9.29	11.45	9.33	11.49	9.38
Voltage at Maximum Power(Vmp/V)	40.90	38.70	41.21	38.95	41.52	39.19	41.82	39.44	42.13	39.68	42.43	39.90
Current at Maximum Power(Imp/A)	10.76	8.60	10.80	8.64	10.84	8.68	10.88	8.72	10.92	8.76	10.96	8.81
Module Efficiency(%)	20.13		20.36		20.58		20.81		21.04		21.27	

**TEMPERATURE RATINGS**

Norminal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of Isc	+0.044%/°C
Temperature Coefficient of Voc	-0.272%/°C
Temperature Coefficient of Pmax	-0.350%/°C

**I-V CURVE(AS440-465BM6-144)**

