

LiFePO4 Technology Brief Introduce

LPR series battery system is 24V/24V/12V system for communications back-up type LiFePO4n(lithium iron phosphate) battery products, the system uses the advanced LiFePO4 battery technology with the benefit of long cycle life, small size, light weight, safety and environmental protection, and has a strong environmental adaptability, it is idea for harsh outdoor environments.

The system also integrates a smart battery management and monitoring module, support for remote centralized monitoring and remote battery management and maintenance, to meet the requirements of unattended. Therefore, the LPR system can fully meet the backup power supply requirements of the access network equipment, mobile communications equipment, transmission equipment, micro base stations and microwave communication equipment.


Applications

- BTS Stations, Telecom System
- Access net work system
- UPS System, EPS System
- Solar Energy/Off-Grid System
- Indoor distribution system
- Internet data center(IDC)
- Terminal of FTTX

Technical Specifications



Long Life Lithium Iron Phosphate Deep Cycle

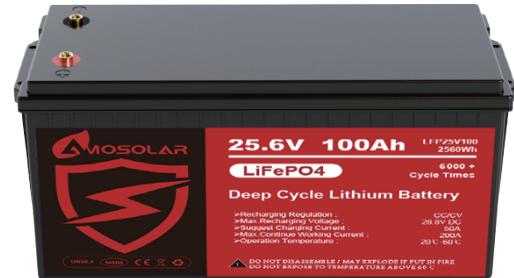

Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	100Ah
	Energy	2560Wh
	BMS with internal cell balancing	YES
	Cycle Life	≥6000cycles @80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100%@0.2C
	Efficiency of Discharge	96~99%@0.5C
Standard Charge	Charge Voltage	28.8±0.1V
	Charge Mode	0.2-0.5C to 27.0V, then 27.0V, charge current to 0.02C(CC/CV)
	Charge Current	50A
	Max. Charge Current	100A
	Charge Cut-off Voltage	28.8V±0.2
Standard Discharge	Continuous Current	20A
	Max continuous discharge current	100A
	Discharge Cut-off Voltage	20.0V±0.1
	Water Dust Resistance	IP64
Environmental	Cell & Method	Square Cell 3.2V100Ah 8S1P
	Case	ABS
	Dimensions (in./mm.)	532*207*215mm
	Weight (lbs./kg.)	Approx:20Kg
	Gravimetric specific energy	102.4WH/KG
Mechanical	Protocol (optional)	ModBus/RS485/RS232
	SOC (optional)	LCD


Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **Amosolar** for the latest information.

BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Short detection function
- Balance function

Performance Characteristics (Data test from 4 Series Cell)


Different Rate Discharge Curve (25°C)

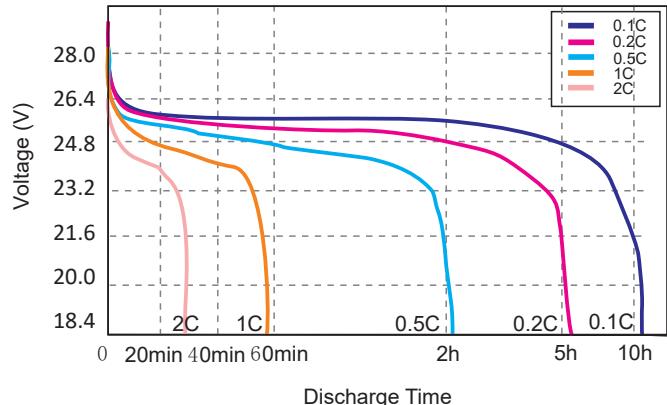


Different Temperature Discharge Curve At 0.5C

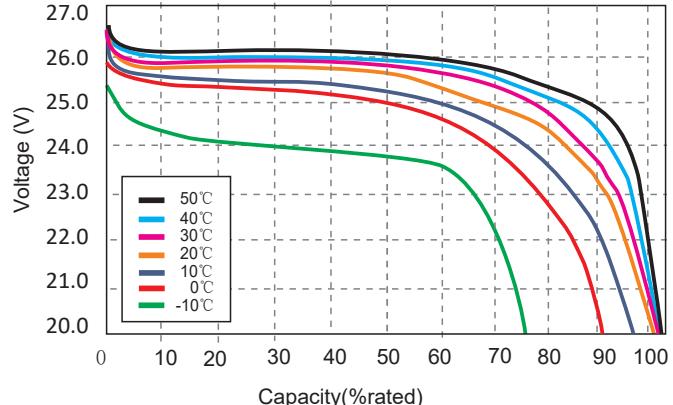


State Of Charge Curve At 0.5c (25°C)

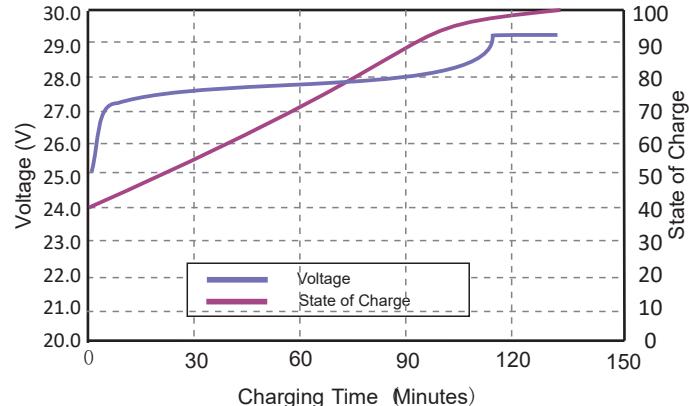


Charging Characteristics At 0.5c (25°C)

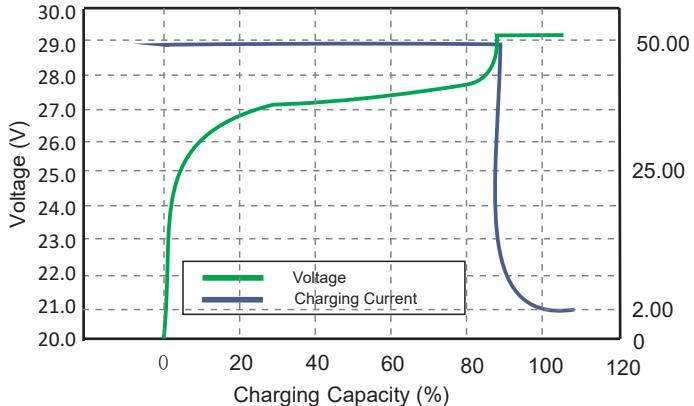

Cycle Life Curve At 1c According DoD

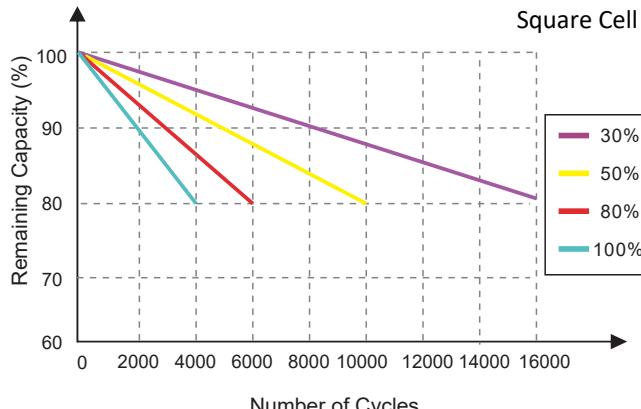

Self Discharge Characteristics Curve

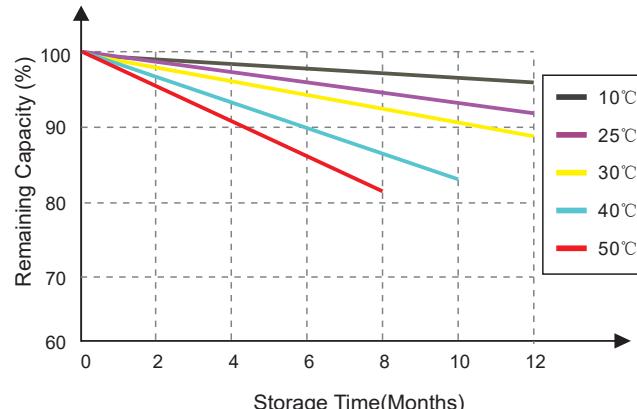

SAFETY WARNING: USE ONLY WITHIN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

Add: No.210, Qianshan Road, Shushan District, Hefei, Anhui, China.

Email: info@amo-solar.com

Website: www.amo-solar.com